



1. Download and Open the Tuya Smart app on your mobile device
2. Click “sign up”, fill out your email address and then enter the verification code after you receive the email from Tuya. Then, create your password and login.
3. Tap the top right “+” icon or the “Add device” button to add your device. If your location is off , you are prompted to turn it on and grant permission



4. On the left, select the “Camera & Lock” option. Then, Select “Smart Camera (Wi-Fi)”




5. Power up the camera. Connect your camera to the power supply which comes with the PTZ camera and then connect to the wall power outlet. The camera LED indicator light will flash rapidly.
6. Once the camera’s indicator blinks and you will repeat hearing the same voice prompt. Then, in the Tuya app, enable the “Make sure the indicator is flashing quickly or a prompt tone is heard” and then hit “Next”

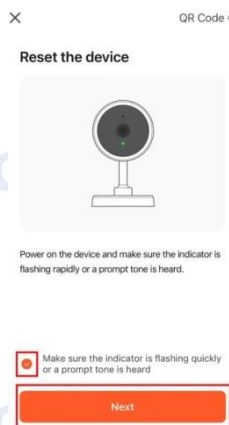

7. Connect to your home network. Select the 2.4GHz version of your Wi-Fi network and enter the correct password.


*** Depends on the router model, 2.4GHz and 5GHz band may combine or separate in same or different SSID. For example, you set the router SSID as "sikkerctv". Go to the cell phone Wi-Fi setting page. If you see both "sikkerctv-2G" and "sikkerctv-5G", then, you should connect to "sikkerctv-2G". If you only see "sikkerctv" without any 2G or 5G at the end, it is combine type router which you only need to connect the SSID "sikkerctv". Here is the sample which the SSID "sikkerctv". You will see the scree like below.

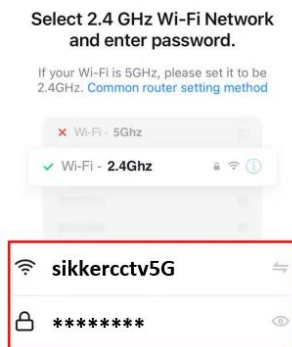

Press  to go to your cell phone setting page. Go to Wi-Fi setting. You will see the cell phone is connecting to "sikkerctv5G".



Press "sikkerctv2G" to switch to 2.4GHz band, then, go back to Tuya app. click "Next"

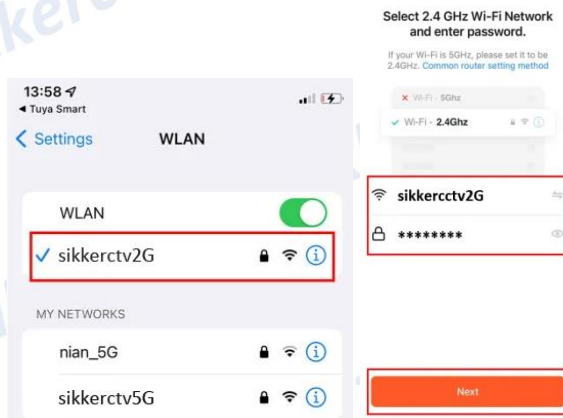

8. You will see the QR code in the Tuya app



Please scan the QR code from 15 to 20 cm away



I Heard a Prompt

No Prompts



Put your cell phone 10-15 cm away from the Wi-Fi camera's front lens that let the Wi-Fi camera scan your QR code. After a successful scan, you get a confirmation voice prompt. Tap the "I heard a Prompt" button to continue.

9. Connecting the device. Let the app scan, register and initialize your smart camera. Once the device is added, you get an “Added successfully” window and prompt from the device.
10. Rename the device by tapping on the edit (pencil icon). And tap Done to finish

Once the camera is loaded to your home screen, select it to view live stream!

***** If it can't add the device successfully, depends on model, at the bottom of the Wi-Fi camera or on the camera cable, press and hold the “reset” button for 5 second and you will see the LED indicator light flash rapidly again. Then, follow step 5 – 8 to setup once again.**

